

HANECO LED HIGHBAY INSTALLATION GUIDE

SKYLUX G4/SL/SP

Thank you for choosing Haneco SKYLUX G4/SL/SP Highbay.
We strongly recommend that you read this manual carefully before installation.

This installation guide is suitable for SKYLUX G4/SL/SP model.

WARNING

- Installation must be carried out by a licenced electrician and in accordance with these instructions and relevant Australian standards and local regulations.
- Ensure input voltage conforms within product specifications.
- Ensure wires are securely connected.
- Before switching on, ensure all wires are correctly connected.
- The warranty is void if product is not installed according to the instructions.

Note: Product technical information and specification may change over time without prior notice. For latest information, please contact our customer service or visit our website www.haneco.com.au

Product Specification

PRODUCT CODE	POWER	CCT	VOLTAGE/ FREQUENCY	IK/IP RATING	OPERATING TEMPERATURE
SKYLUX120W-G4	60/70/90/120	3000/4000/5000	220 - 240 50Hz - 60Hz	IK08 IP65	-35 - 50°C
SKYLUX200W-G4	100/150/170/200	3000/4000/5000			
SKYLUX120W-SL	60/70/90/120	5000			
SKYLUX200W-SL	100/150/170/200	5000			
SKYLUX120W-SP	60/70/90/120	5000			
SKYLUX200W-SP	100/150/170/200	5000			

Installation


1. Ensure main power supply is switched off before commencing the installation.
2. Remove the IP65 cover to access the power and color dip switch. Push inward and turn counterclockwise to remove the IP65 cover as shown in the figure below.

3. Set the desired power and color tone.

Note:

a) Only Skylux G4 model has the color switchable option.


b) Fitting are preset with it highest wattage. To adjust lower fitting wattage, turn the dip switch to ADJ.




4. Ensure to install the IP65 cover.
5. Screw the eye bolt on top of the luminaire.
6. Install optional accessories and desired mounting setting.
7. Install the luminaire onto the desired location.

Mounting Option


Ceiling mounting with hook

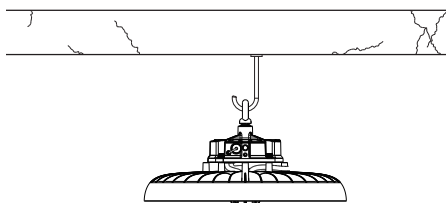


Ceiling or wall mount with bracket
Not Included (available as accessories)

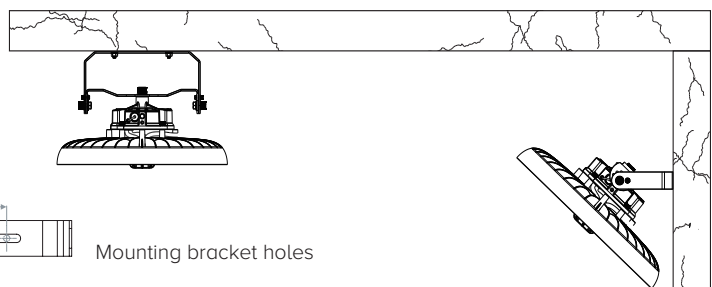


Motion Sensor Installation



STEP 1. Switch Off the power supply. Remove the IP65 cover by rotating it counterclockwise and pull outward.



STEP 2. Insert the microwave sensor (HIGHBAY- MS : 2002281). Push downward and turn clockwise (360°) to engage the sensor. Motion sensor setting are set using a remote controller (HIGHBAY-REMOTE : 2002282).



STEP 3. It is correct installation when the microwave sensor are aligned with the marker as shown in image. Turn ON the unit power and set the microwave sensor suit.

Product Dimension

Dimension	Skylux G4		Skylux SL/SP	
	120W	200W	120W	200W
a	300	340	265	300
b	65		75	
c	6.5		8.0	
d	133		134	
e	183		n/a	

Accessories (Not included)

PRODUCT CODE	Part number	Description
SKYLUXG4-BRKT	2002276	Skylux G4/SL Mounting Bracket
SKYLUX120G4-PR	2002277	Skylux 120W G4/SL Prismatic Reflector without Cover
SKYLUX200G4-PR	2002278	Skylux 200W G4/SL Prismatic Reflector without Cover
HIGHBAY-MS	2002281	Microwave sensor IP65, 12M
HIGHBAY-REMOTE	2002282	Remote control
SKYLUXG4-EMKIT	2002275	Emergency kit
HBay-DALI-CONV	2002095	DALI Converter