


# STAX<sup>ECO</sup>

STAX100W4K  
 SAP CODE: 2002132

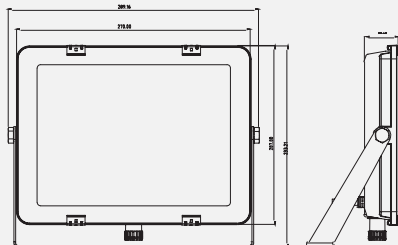


## A versatile and efficient LED floodlight

The STAX ECO is the next generation in our versatile and efficient LED floodlight range. With a range of power from 20W to 200W it is excellent for a wide number of applications.



Photometric Diagram



Unit: cd  
 - C0/180 114.7deg  
 - C90/270 114.6deg

### KEY INFORMATION

Watts	100W
Input Power	100W
Lumen Output (p/metre)	9600lm
Install	Surface Mount
Dimming Options	Non-Dimmable
Fitting Colour	Matte Black
Warranty	3 years
IP Rating	IP66
IK Rating	IK08
IC Rating	N/A
Rebate Scheme Approval	IPART LCP 103.8

### PHOTOMETRIC

Efficacy	96lm/W
LED	SMD
CCT	4000K
Beam Angle	110°

### ELECTRICAL

Driver	Integral (DOB)
Supply Input	220-240Va.c. 50/60Hz
Driver Output Voltage	-
Power Factor	>0.9
LED Input Current (nominal)	-
Useful life @Ta25° (L70)	-

### CONSTRUCTION

SCDM	<5
Housing	Die-cast Aluminum
Optics	Glass Lens
Adjustable Angle	N/A
Fixings/Hardware	Mounting bracket
Connection Type	1m Flex
Total Weight	1.8kg
Dimensions	270x207x40mm
Operating Ambient Temp.	-20 to 45°C
Electrical Classification	Class 1

### ACCESSORIES



STAX90D-BRKT-L