

# Catalogue No: **DINTMS1003**

## DIN-T MAIN SWITCH 3P 100A

Power Distribution and Protection > Circuit Breakers > Miniature Circuit Breakers and Earth Leakage Protection (RCDs and RCBOs) > DIN-T Accessories > DIN-T Main Switches > Main Switches



### DIN-T Main Switch 3P 100A

- Side mount 63 to 100 A NC Chassis
- Side mount 63 - 80 A CD Chassis

Representative Photo Only  
(actual product may vary based on configuration selections)

#### SPECIFICATIONS

Product Series	DIN-T
Component Type Power Distribution & Protection	Main Switch
In, Rated Current	100 A
Poles	3P
Contact Configuration	2 Contacts
Mechanical Service Life	20000 cycles
Electrical Service Life at Un, In	1500 cycles
IP Rating	IP20
Wire / Conductor Size (Min)	6 mm <sup>2</sup> min
Wire / Conductor Size (Max)	50 mm <sup>2</sup>
Height	86 mm
Width	54 mm
Depth	76 mm
Operating Temperature, Min	-5 °C min
Operating Temperature, Max	40 °C max
Storage Temperature, Min	-25 °C min
Storage Temperature, Max	70 °C max
Standards Compliance	AS/NZS 60947-3



# DIN-T


# Catalogue No: **DINTMS1003**

## DIN-T MAIN SWITCH 3P 100A

Power Distribution and Protection > Circuit Breakers > Miniature Circuit Breakers and Earth Leakage Protection (RCDs and RCBOs) > DIN-T Accessories > DIN-T Main Switches > Main Switches



REFERENCES	
IECEX Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-

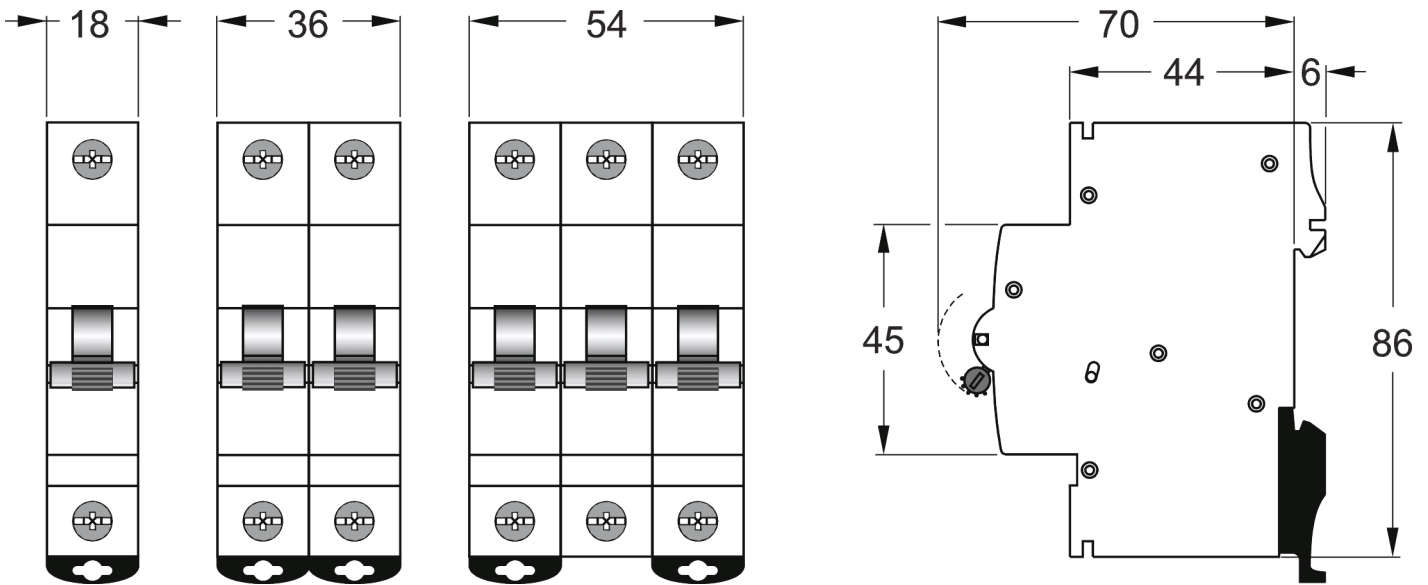

Dimension Diagram