



## CLEVERTRONICS ECONOMY LITHIUM LED SUPALITE



### PRODUCT INFORMATION

Catalogue Number	EFLLED-LI
Description	Economy Lithium Supalite LED Flood Unit, Surface Mounted Emergency Light
Construction	Polycarbonate
Mounting	Surface Mounted. Supplied with flex and plug (the flex and plug can be removed to allow for a hard wired connection)
Dimensions L x W x H	Main enclosure - 282mm (W) x 137mm (H) x 64mm (D) Total height including LED Heads 225mm.
Weight	1.4kg
Operating Mode	Non-maintained
Testing System	N/A - Manual test switch
Battery	Lithium Iron Phosphate, 3.2V 6000mAh
Charging Method	Intelligent Current Limited Constant Voltage
Lamp(s)	2 x LED Heads (adjustable), 175lm per lamp head
Operating Voltage	240V AC; 50Hz
Power Consumption	0.4 Watts (Standby), 2.4 Watts (Max)
IP Rating	IP20
Operating Temperature	1°C to 40°C
AS2293 Classification	C <sub>0</sub> =N/A C <sub>90</sub> =N/A

### REPLACEMENT PARTS


PART NUMBER	DESCRIPTION
1560250	BATT:EcoLith 3.2V 6.0Ah 200mm lead, BKT
8002975	PCA: EFLLED-LI #CT10614-L1





## Spacing Guidance

Polar curve for a single LED lamp head

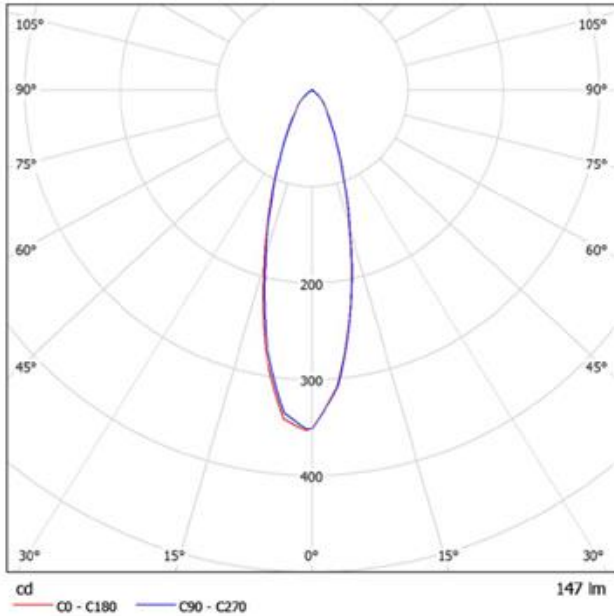

Isolux plot and value table for a 10m x 10m area serviced by an EFLLED with each LED lamp head tilted down 30°, rolled out 30°. EFLLED mounted on the wall at a height of 3m (values in lux).

