



VIDEO INTERCOM


900 HD SERIES



panacom[®]


panacom
PAN920SKHD

Colour HD camera with
7" LCD HD monitor

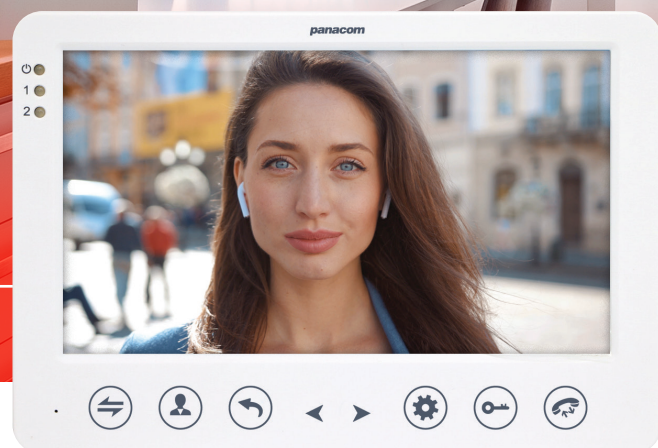

panacom
PAN930SKHD

Colour Full HD camera with
7" touchscreen LCD Full HD monitor

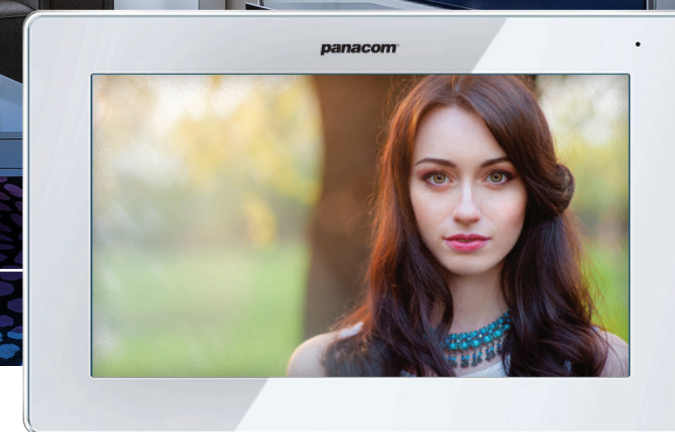

The PAN920SKHD video intercom is a cost effective door entry solution providing HD colour resolution and modern monitor design with touch button controls. The metal IP65 rated door camera and recording function (when optional microSD card fitted) will provide the added door entry security required for all families.



7" LCD HD MONITOR

Crystal clear HD display with touch button controls and easy to follow GUI menu system

INTERCOMMUNICATION & CALL TRANSFER

Intercommunicate with all or a specific internal monitor within the system. Call transfer allows the transfer of calls from one monitor to another when door bell is pressed.

EXPANDABLE SYSTEM

Expand the system to 2 door stations, 2 CCTV cameras and 6 monitors

WEATHER RESISTANT DOOR CAMERA

IP65 rated slim profile door camera with 1.3MP resolution and 120° wide angle lens. 45° Angle bracket included for side wall mounting

MEMORY RECORDING WITH MICROSD CARD

Record missed calls or visitors when the door button is pressed when microSD card fitted (card not supplied). If CCTV cameras & sensors are connected to the system, an alarm trigger can activate recording to the MicroSD card.

CCTV CAMERA AND SENSOR CONNECTION

Connect max 2 CCTV cameras and 2 alarm sensors which can trigger recording if MicroSD card is fitted.

* CCTV cameras must be AHD or CVBS.

4 WIRE SYSTEM

Easy to install and reliable 4 wire system. CAT5e up to 50m.

DOOR RELEASE FUNCTION

Flexible door release options. 12VDC output, N/O or N/C contacts.

DIGITAL PHOTO FRAME

Display your favourite photos whilst on standby using the digital photo frame mode when pictures are saved on a microSD card (card not supplied).

MUSIC & RINGTONES

Add your own MP3 music files to the MicroSD card to play music or use as your personal ringtone

The PAN930SKHD video intercom provides FULL HD 1080P resolution in a modern 7" touchscreen monitor. With a digital photo frame function, display all your holiday memories in full HD whilst on standby mode. The new intuitive GUI allows for easy navigation of features such as internal communication, recording and monitoring of CCTV cameras. The PAN930SKHD is the perfect entry system to all modern homes for security and lifestyle.



7" LCD FULL HD TOUCHSCREEN DISPLAY

Crystal clear glass panel FULL HD 1080P touchscreen display with easy to follow GUI menu system

DIGITAL PHOTO FRAME

Display your favourite photos whilst on standby using the digital photo frame mode when pictures are saved on a microSD card (card not supplied).

RECORDING WITH MICROSD CARD

Record missed calls or visitors when the door button is pressed when microSD card fitted (card not supplied). If CCTV cameras & sensors are connected to the system, an alarm trigger can activate recording to the MicroSD card.

INTERCOMMUNICATION & CALL TRANSFER

Intercommunicate with all or a specific internal monitor within the system. Call transfer allows the transfer of calls from one monitor to another when door bell is pressed.

EXPANDABLE SYSTEM

Expand the system to 2 door stations, 2 CCTV cameras and 6 monitors

CCTV CAMERA AND SENSOR CONNECTION

Connect max 2 CCTV cameras and 2 alarm sensors which can trigger recording if MicroSD card is fitted.

* CCTV cameras must be AHD or CVBS.

WEATHER RESISTANT DOOR CAMERA

IP65 rated door camera with 2.0MP resolution 120° wide angle lens. 45° Angle bracket included for side wall mounting

DOOR RELEASE FUNCTION

Flexible door release options. 12VDC output, N/O or N/C contacts.

GATE RELEASE FUNCTION

N/O relay from monitor for motorised gate operation


MUSIC & RINGTONES

Add your own MP3 music files to the MicroSD card to play music or use as your personal ringtone




AVAILABLE AS A FLUSH MOUNT KIT

PAN920FKHD

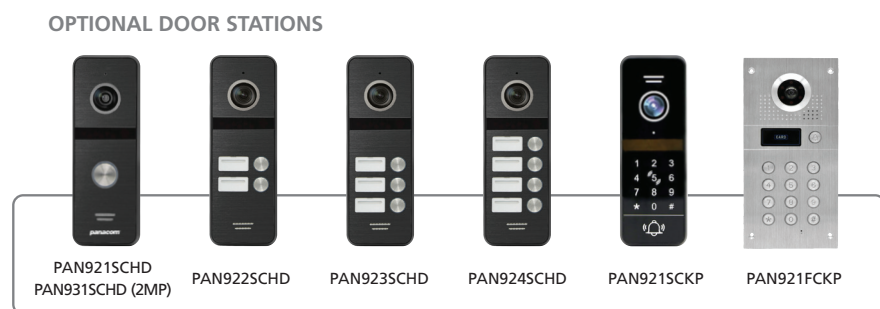


AVAILABLE AS A FLUSH MOUNT KIT

PAN930FKHD

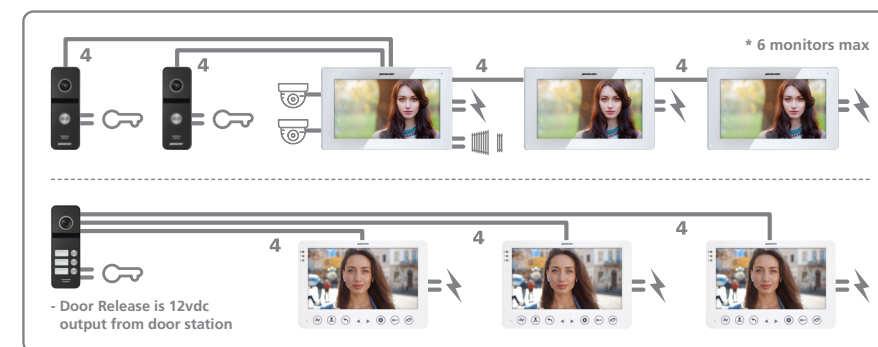



| Part Number | PAN921SCHD / PAN922SCHD / PAN923SCHD PAN924SCHD / PAN921SCKP / PAN931SCHD | PAN921FCHD / PAN931FCHD PAN921FCKP |
|--|---|---|
| Camera Sensor | 1.9mm 1/3" wide angle CMOS lens | 1.9mm 1/3" pinhole CMOS lens |
| Viewing Angle | 120° Horizontal | 120° Horizontal |
| Definition (Hor.) | 1.3MP/960P (PAN921SCHD/PAN922SCHD/PAN-923SCHD/ PAN924SCHD/PAN921SCKP) 2.0MP/1080P (PAN931SCHD) | 1.3MP/960P (PAN921FCHD/PAN921FCKP) 2.0MP/1080P (PAN931FCHD) |
| LED's for Night Vision | IR LED's (120°) | IR LED's (120°) |
| Weatherproof IP Rating | IP65 | IP65 |
| Power Consumption | 150mA max. | 150mA max. |
| Power | 12VDC from Indoor Monitor | 12VDC from Indoor Monitor |
| Operating Temperature | -40° ~ +50° C | -40° ~ +50° C |
| Lock Output | 12VDC , NO/NC Contact | 12VDC , NO/NC Contact |
| Installation Type | Surface Mounted | Flush Mounted |
| Access Control (PAN921SCKP/PAN931FCKP only) | 200 PIN codes 200 Key tags (13.25Mhz) | 200 PIN codes 200 Key tags (125KHz) |
| Dimensions (H x W x D) | 133 x 48 x 17.5mm | PAN921FCHD/PAN931FCHD 190 x 130 x 2mm plate 171 x 111 x 45mm wall box PAN921FCKP 251 x 120 x 3mm plate 238 x 113 x 39mm wall box |



| Part Number | PAN930MHD | PAN920MHD |
|-----------------------------|---|--------------------------------|
| Display | 7" TFT LCD HD Touchscreen Display (16:9) | 7" TFT LCD HD Display (16:9) |
| Definition | 1024 x 600 | 1024 x 600 |
| Video Standard | PAL | PAL |
| Intercom Mode | Semi-Duplex Communication | Semi-Duplex Communication |
| Conversation Duration | 120 seconds | 120 seconds |
| Power Consumption Standby | | 250mA max |
| Power Consumption Working | | 600mA max |
| Power Supply | 12VDC 2A | 12VDC 2A |
| Operating Temperature | -10° ~ +50° C | -10° ~ +50° C |
| Installation Type | Surface Mounted | Surface Mounted |
| Picture Format | JPEG | JPEG |
| Extension Memory | Micro SD Card 128GB max. | Micro SD Card 32GB max. |
| CCTV Cameras | Max. 2 (AHD or CVBS) | Max. 2 (AHD or CVBS) |
| Alarm Inputs | NO or NC contacts | NO or NC contacts |
| Dimensions | 190 (W) x 120 (H) x 21.5mm (D) | 193 (W) x 123 (H) x 21.5mm (D) |
| System Cabling Requirements | 4 Wires <50m – CAT5e, <50m - 4 * 0.5mm ² , <100m - RG59 Coax + 4 * 0.5mm ² | |
| Maximum Wiring Distance | 100m | 100m |

****Keep intercom wires more than 30cm away from AC power to avoid interference and malfunction.**



17 Millicent Street, Burwood, VIC 3125 Australia
 Tel: 1300 PSA PRODUCTS (1300 772 776)
 Fax: (03) 9888 9993
 enquiry@psaproducts.com.au

psaproducts.com.au

Available From:

